

FUJI MINILAB FA-COMPACT II SPECIFICATIONS

FILM PROCESSOR FP230B

Type:	Daylight, floor type.
Films:	110, 126, 135, and 120.
Processing chemical:	CN-16Q.
Processing time:	14 min. 40 sec. (dry to dry).
Processing speed:	260mm/min.
Processing capacity:	22 rolls/hr. (135/24 exp.).
Replenishment tanks:	7ℓ×5 (with simplified mixing units, level sensors).
Power requirements:	AC 200/210/220/230/240V; single phase; approx. 2.54kVA.
Dimensions:	517(W)×1,062(D)×1,170(H) mm (including film stock box).
Weight:	105kg (175kg during operation).

PRINTER PROCESSOR PP541B

Type:	Daylight, floor type (printer, paper processor and paper cutter in single unit construction).
Actual production capacity:	480 prints/hr. (8.9×12.7cm/3R); 430 prints/hr. (10.2×15.2cm/4R); 190 prints/hr. (25.4×8.9cm/panorama); with standard negatives (population center), inclusive of film handling time (10 sec. per roll) but excluding down-time due to paper/size changes.
Power requirements:	AC 200/210/220/230/240V; single phase; approx. 3.37kVA.

PRINTER

Negatives:	110, 126, 135F/H, panorama and 120.
Paper width:	8.9, 10.2, 12.7, and 15.2cm.
Print size:	3R (8.9×12.7cm)~6RW (15.2×21.6cm), and panorama (8.9×25.4cm).
Paper length:	180m (max.) for reusable paper magazine usage.
Printing capacity:	503 prints/hr. (8.9×12.7cm/3R), 135F 1 step over negative with ACCS-II and edge detection function.
Dimensions:	500(W)×1,205(D)×1,335(H) mm.
Weight:	175kg (241kg in operation).
Light metering:	Auto metering by ACCS-II.
Negative carrier:	NC135CP automatic negative carrier for 135F/H and panorama (automatic negative feeding and printing one frame at a time by ACCS-II and DX code reader).

Paper mask:	Variable paper mask (width: 8.9~15.2cm, length 8.25~25.4cm).
Scanner:	Color Scanner ACCS-II.

PROCESSOR


Processing chemical:	CP-40FAII.
Processing speed:	914mm/min.
Processing time:	3 min. 55 sec. (dry to dry).
Replenishment tanks:	7ℓ×3 (with simplified mixing units, level sensors).
Optional accessories:	Auto negative carrier for 110 (NC110C); manual negative carrier for 110 to 120.

•Specifications and appearance are subject to change without notice.


Dimensions

Unit: mm

FILM PROCESSOR FP230B

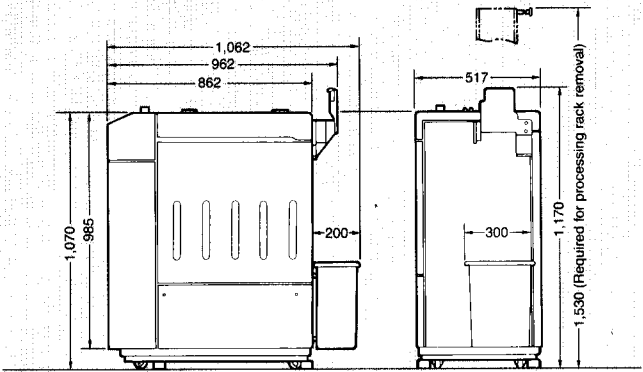

PRINTER PROCESSOR PP541B

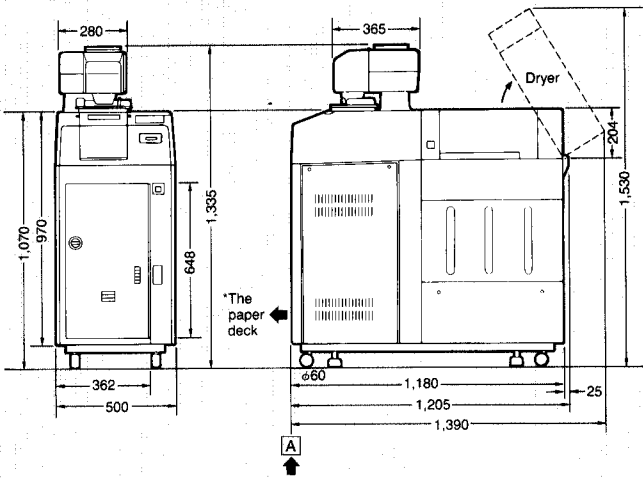

\*The paper deck can be pulled out 518mm from surface [A].